




TECHNICAL SPECIFICATIONS

DRIVER POSITION	Left-hand drive with power assisted steering as standard.
GEARBOX	New Iveco gearbox with 10 forward + 2 reverse speeds (5+1 low range, 5+1 high range) and reinforced final drive with third locking differential .
BRAKES	Servo-assisted hydraulic brakes with brake compensator, dual-circuit pump, rear drums and front discs. Mechanical parking brake on rear axle.
DIMENSIONS	Wheelbase 2670 mm, length 4360 mm.
WHEELS/TYRES	215/75R16C 8PR.
BODY	2750 x 1600 x 400 mm with headboard (behind cab). Electro-hydraulic three-way tipping with 2 pistons. Top- and bottom-hinged tailgate.
PAYLOAD	Max 2300 kg, gross vehicle weight rating 5000 kg.
SUSPENSION	Front: MacPherson independent suspension with coil springs and shock absorbers with top mounting equipped with ball bearing. Rear: with parabolic leaf-springs, double-acting shock absorbers and auxiliary leaf spring.
CHASSIS	Bolted steel chassis comprising 2 ASSOFLEX C-section rails.
POWER TAKE-OFF	Predisposed, variable-speed central coupling (on transfer case).
ELECTRICAL SYSTEM	12V regulation-compliant lighting system, reversing light, rear fog light.
SPEED	40 km/h.
CAB	Type-approved for 3 seats , sound-insulated with tempered glass, windscreen wipers, split sliding seats, seat-belts, interior heating, type-approved crush protection roll-bar.
STANDARD EQUIPMENT	Spare wheel, jack with wrench, type-approved tow bar for unbraked trailer weight of 1500 kg, electric windows, stereo radio system, rear light guards, wash/wipe kit, light combination switch, user accessories, use and maintenance manual, colour: red.

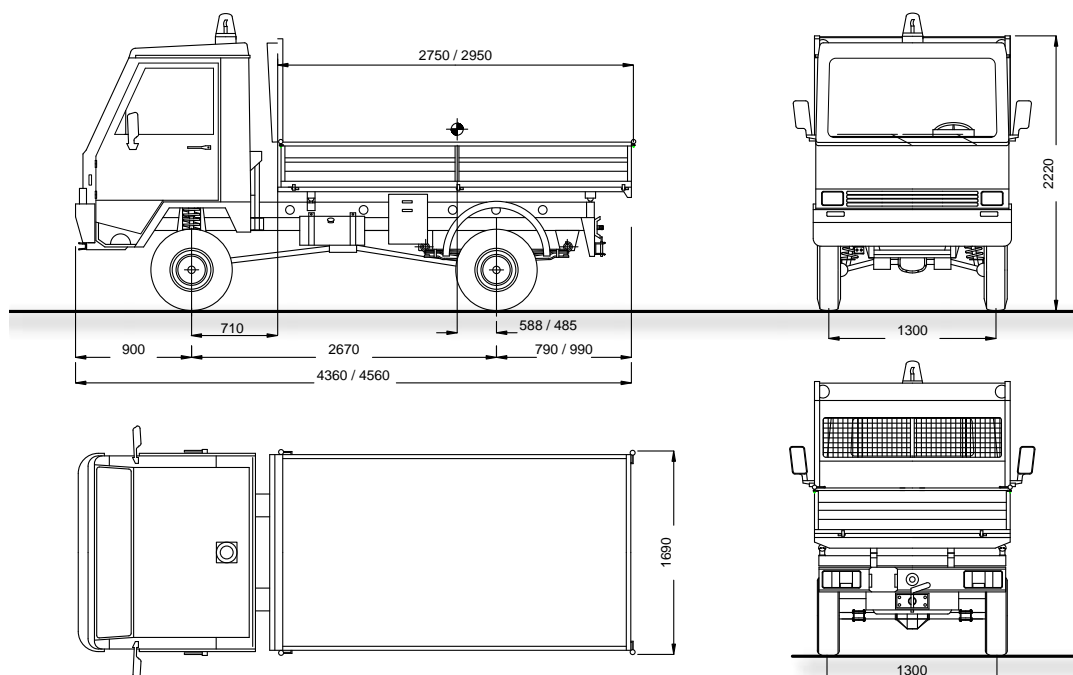

VERSIONS

PART NUMBER	DESCRIPTION
RS50 E06 X00A	Lombardini Kohler KDI 2504M (97/68/EC Step III A Approved), 4-cylinder, 4-stroke, water-cooled diesel with axial fan. Rated power 50 HP (36.4 kW) @ 2600 rpm, displacement 2482 cc, peak torque 170.00 Nm @ 1500 rpm.

OPTIONAL VARIANTS AND ACCESSORIES

PART NUMBER	DESCRIPTION
E06 X004	MAX pick-up body 2950 x 1600 x 400 mm - difference
E06 X005	LONG WHEELBASE version, wheelbase 2900 mm - difference
E06 X006	EXTRA MAX pick-up body 3000/3200 x 1600 x 400 mm (requires LONG WHEEL-BASE) difference
E06 X007	Twin-wheel rear axle
E06 X014	Side-mounted PTO with disengagement and hydraulic pump (for tipping body)
E06 X015	Electronic odometer
E06 X016	Disengageable rear PTO unit with drive shaft and manual accelerator
E06 X017	Cataphoretic cab coating
E06 X018	Locking rear differential
E06 X025	ZF transmission (difference)
E06 X027	External sun visor on cab
E06 X028	Cab-mounted work-light bar with 2 lights
E06 X032	Air conditioning
E06 X033	Rear disc brakes (with ventilated front disc brakes) - difference
E06 X034	Inverter unit for rear PTO
Colour	Colours other than the standard red to be chosen from the catalogue (difference)
VARIANTS AND ACCESSORIES FOR PICK-UP BODY: SEE SECTION 4	