




TECHNICAL SPECIFICATIONS

DRIVER POSITION	Left-hand drive with power assisted steering as standard.
GEARBOX	New Iveco gearbox with 10 forward + 2 reverse speeds (5+1 low range, 5+1 high range) and reinforced final drive with third locking differential.
BRAKES	Servo-assisted hydraulic brakes with brake compensator, dual-circuit pump, rear drums and front discs. Mechanical parking brake on rear axle.
DIMENSIONS	Wheelbase 2370 mm, length 4320 mm.
WHEELS/TYRES	205/75R16C.
BODY	2750 x 1600 x 400 mm with headboard (behind cab). Electro-hydraulic three-way tipping with 2 pistons. Top- and bottom-hinged tailgate.
PAYLOAD	Max 3800 kg, gross vehicle weight rating 6000 kg.
SUSPENSION	Front: MacPherson independent suspension with coil springs and shock-absorbers with top mounting equipped with ball bearing. Rear: with parabolic leaf-springs, double-acting shock absorbers and auxiliary leaf spring.
CHASSIS	Bolted steel chassis comprising 2 ASSOFLEX C-section rails.
POWER TAKE-OFF	Predisposed, variable-speed central coupling (on transfer case).
ELECTRICAL SYSTEM	12V regulation-compliant lighting system, reversing light, fog light, flashing beacon.
SPEED	40 km/h.
CAB	Type-approved for 3 seats , sound-insulated with tempered glass, windscreen wipers, split sliding seats, seat-belts, interior heating, type-approved crush protection roll-bar.
STANDARD EQUIPMENT	Spare wheel, jack with wrench, type-approved tow bar for unbraked trailer weight of 1500 kg, electric windows, stereo radio system, rear light guards, wash/wipe kit, light combination switch, user accessories, use and maintenance manual, colour: red.

MITHOS
"TWIN-WHEEL"

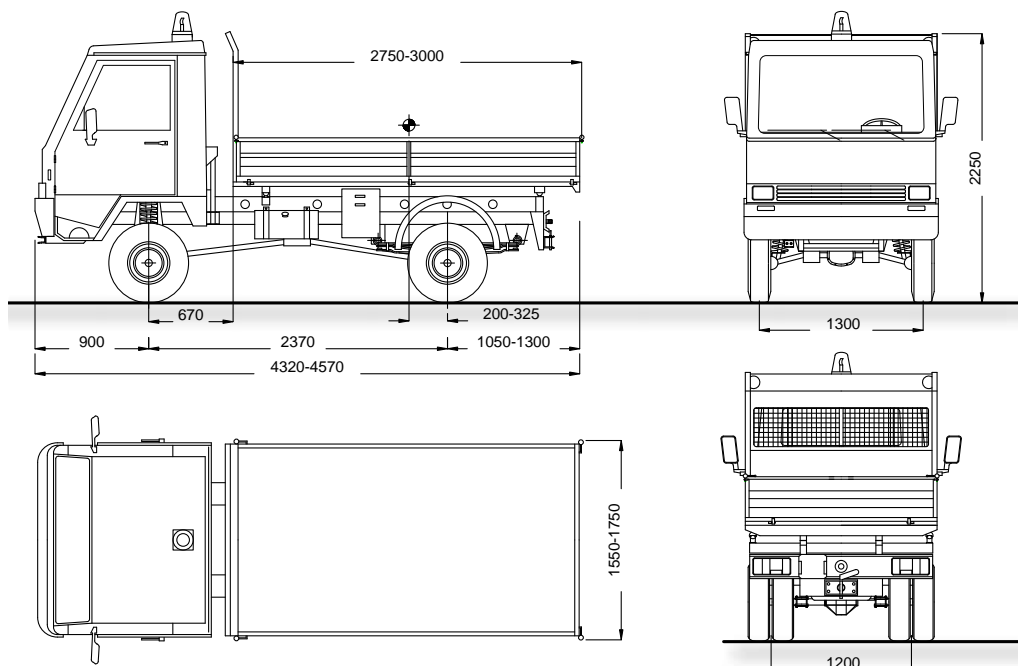

VERSIONS

PART NUMBER	DESCRIPTION
LDW E07 P00A	Lombardini LDW 2204 CHD (97/68/EC Step III A Approved), 4-cylinder, 4-stroke, water-cooled diesel with axial fan. Rated power 50 HP (36.6 kW) @ 3000 rpm, displacement 2199 cc, peak torque 132.5 Nm @ 2000 rpm.
P1 E07 P00C	PERKINS 804C-33 (97/68/EC Step III A Approved), 4-cylinder, 4-stroke, water-cooled diesel with axial fan. Rated power 64 HP (47 kW) @ 2600 rpm, displacement 3331 cc, peak torque 200 Nm @ 1600 rpm.
I1 E07 P00D	IVECO F32-MNS TURBO (97/68/EC Step III A Approved), 4-cylinder, 4-stroke, water-cooled diesel with axial fan. Rated power 75 HP (55 kW) @ 2500 rpm, displacement 3200 cc, peak torque 281 Nm @ 1250 rpm.

OPTIONAL VARIANTS AND ACCESSORIES

PART NUMBER	DESCRIPTION
E07 P003	LONG WHEELBASE version with wide rear track (wheelbase 2670, rear track 1150) difference
E07 P004	MAX pick-up body 3050 x 1750 x 400 mm (requires LONG WHEELBASE) difference
E07 P005	EXTRA LONG WHEELBASE version with wide rear track (wheelbase 2900, rear track 1150) difference
E07 P006	EXTRA MAX pick-up body 3250 x 1750 x 400 mm (requires EXTRA LONG WHEELBASE) difference
E07 P007	W-EXTRA LONG WHEELBASE version with wide rear track (wheelbase 3200, rear track 1150) difference
E07 P008	W-EXTRA MAX pick-up body 3500 x 2000 x 400 mm (requires W-EXTRA LONG WHEELBASE) difference
E07 P014	Side-mounted PTO with disengagement and hydraulic pump (for tipping body)
E07 P015	Electronic odometer
E07 P016	Disengageable rear PTO unit with drive shaft and manual accelerator
E07 P017	Cataphoretic cab coating
E07 P018	Locking rear differential
E07 P019	215/75 R16C tyres (difference)
E07 P020	ULPYO type-approved tow bar with hook for trailer weight of 3500 kg with overrun brake
E07 P021	XL cab, width 170 cm - difference
E07 P022	MAXI cab, width 180 cm - difference
E07 P025	ZF transmission (difference)
E07 P027	External sun visor on cab
E07 P028	Cab-mounted work-light bar with 2 lights
E07 P029	Rear disc brakes (with ventilated front disc brakes) - difference
E07 P032	Air conditioning
E07 P033	Inverter unit for rear PTO
Colour	Colours other than the standard red to be chosen from the catalogue (difference)
VARIANTS AND ACCESSORIES FOR PICK-UP BODY: SEE SECTION 4	